

T400 H




AWARDED AMONG THE 100 ITALIAN EXCELLENCE



T400 H

18

Technical Data Sheet

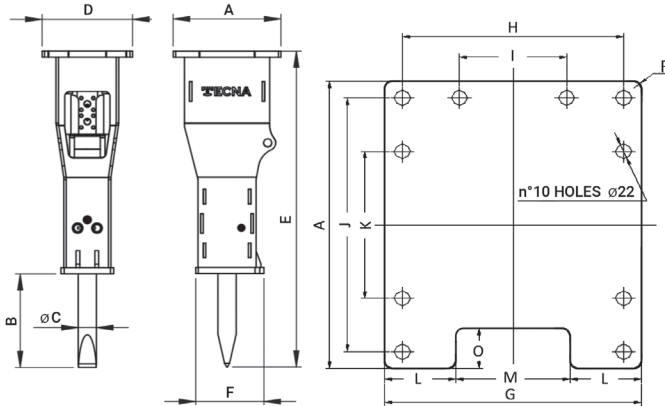

| | MM | INCH |
|-----|------|------|
| A | 430 | 16,9 |
| B | 409 | 16,1 |
| φ C | 80 | 3,1 |
| D | 360 | 14,2 |
| E | 1461 | 57,5 |
| F | 270 | 10,6 |
| G | 360 | 14,2 |
| H | 310 | 12,2 |
| I | 150 | 5,9 |
| J | 380 | 15,0 |
| K | 220 | 8,7 |
| O | 60 | 2,4 |
| R | 10 | 0,4 |
| M | 160 | 6,3 |

| ITALIANO | ENGLISH | DEUTSCH | METRIC UNIT | | IMPERIAL UNIT | |
|---------------------------------------|--|-------------------------------------|-------------|-------|---------------|--------|
| PESO ESCAVATORE | SUITABLE EXCAVATOR | GEEIGNET FÜR TRÄGERGERÄT | 7÷10 | Ton | 15432÷22046 | lbs |
| PESO MEDIO OPERATIVO | OPERATING WEIGHT | ARBEITSGEWICHT DES HAMMERS | 400 | Kg | 881,8 | lbs |
| DIAMETRO UTENSILE | TOOL DIAMETER | MEISSEL DURCHMESSER | 80 | mm | 3,15 | in |
| PORTATA | OIL SUPPLY | ÖLBEDARF | 70÷100 | l/min | 18÷26 | GPM |
| PRESSIONE DI LAVORO | BREAKER WORKING PRESSURE | ARBEITSSOLDRUCK IM HYDRAULIKHAMMER | 100÷140 | bar | 1450÷2031 | PSI |
| PRESSIONE REGOLATA ALL'ESCAVATORE | RELIEF PRESSURE SETTING | ARBEITSSOLDRUCK IM TRÄGERGERÄT | 180 | bar | 2611 | PSI |
| CONTROPRESSIONE MAX | MAX BACK PRESSURE | MAX STAUDRUCK | 20 | bar | 290 | PSI |
| POTENZA INGRESSO (MAX) | INPUT POWER (MAX) | EINGANGS LEISTUNG (MAX) | 22 | Kw | 29,5 | HP |
| CLASSE DI ENERGIA D'URTO | IMPACT ENERGY CLASS | KLASSE SCHLAGENERGIE | 1188 | J | 877 | Ft/lbs |
| NUMERO DI COLPI AL MINUTO | IMPACT RATE | SCHLAGZAHL PRO MINUTE | 700÷1000 | BPM | 700÷1000 | BPM |
| TEMPERATURA MAX OLIO IDRAULICO | MAX TEMPERATURE HYDRAULIC OIL | MAX ÖLTEMPERATUR | 80 | °C | 176 | °F |
| TUBAZIONE IMPIANTO MANDATA (Ø min.) | RECOMMENDED INLET LINE SIZE (Ø min.) | EMPFOHLENE VORLAUF LEITUNG (Ø min.) | 16 | mm | 0,63 | in |
| TUBAZIONE IMPIANTO RITORNO (Ø min.) | RECOMMENDED RETURN LINE SIZE (Ø min.) | EMPFOHLENE RUECKL. LEITUNG (Ø min.) | 22 | mm | 0,87 | in |
| LUNGHEZZA CONSIGLIATA TUBI FLESSIBILI | SUGGESTED MIN FLEX HOSES LENGTH | LÄNGE HAMMER ANSCHLUSS SCHLAUCH | 1600 | mm | 63,0 | in |
| ATTACCO INGRESSO DEMOLITORE | HOSE CONNECTION AT THE BREAKER'S RETURN LINE | HAMMER SCHLAUCH RÜCKLAUF | 3/4" G | | 3/4" G | |
| ATTACCO USCITA DEMOLITORE | HOSE CONNECTION AT THE BREAKER'S INLET LINE | HAMMER SCHLAUCH VORLAUF | 3/4" G | | 3/4" G | |